



## ADSL Transformer For Texas Instruments

- ✿ For use with TI TNRTD4000R, TNRTD3000P/R
- ✿ Designed to meet IR 235°C peak requirement
- ✿ Excellent THD performance
- ✿ Small EP13 Package in SMD and THT Type




### SPECIFICATIONS

Part Number	IC PN	Turn Ratio (2%) (10-7):(1-4)	OCL (1-4) @ 10KHz, 0.1V	Leakage Inductance @ 100 KHz, 0.1 V	Longitudinal Balance (from 30KHz to 1.1 MHz)
XT0018	TNETD4000R	1:1.423	1.5mH (±5%)	18µH MAX	-50 dB MIN
XT5018	TNETD0000P/R				

### SPECIFICATIONS CONTINUE

Part Number	THD @ 100KHz, 15Vpp	DCR (10-7)	Isolation Voltage (Vrms)	Insertion Loss (@ 300 KHz)	Package
XT0018	-80 dB MIN	0.7 Ω MAX	1500	0.5 dB MAX	SMD
XT5018					THT

### DIMENSIONS XT0018

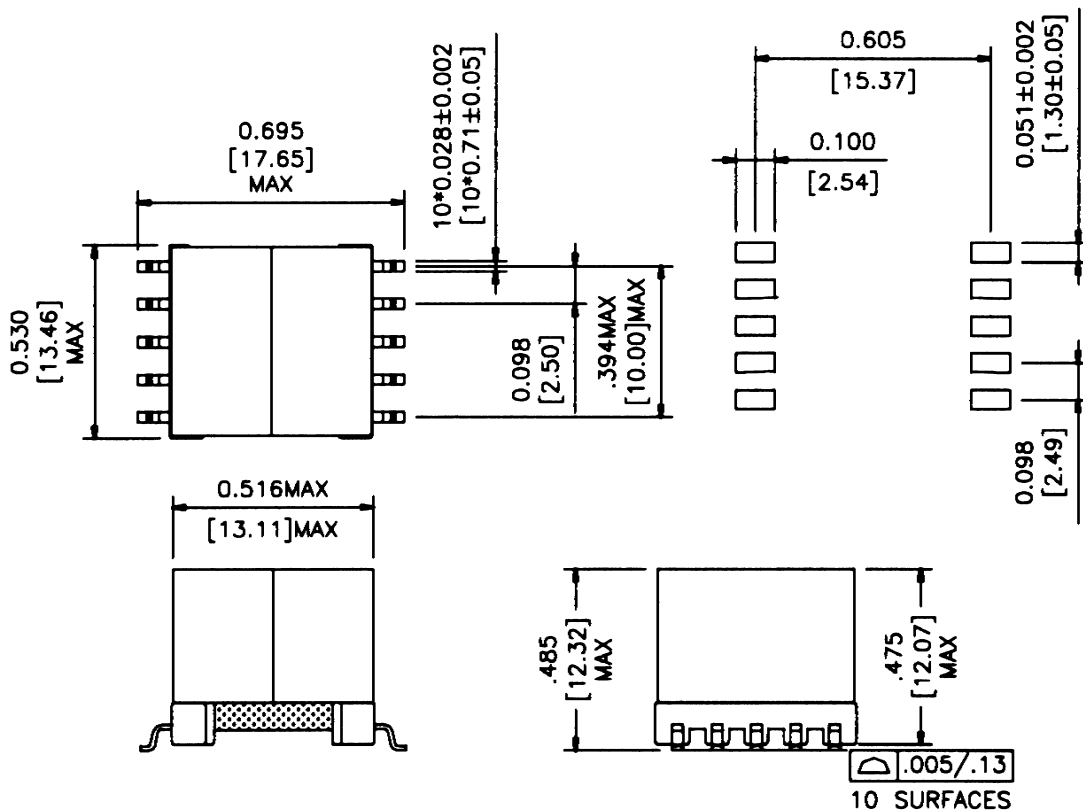


Data sheet subject to change without notice

PREMO S.A. Conchita Supervia, 13 • 08028 BARCELONA (SPAIN)  
 Tel. 34 93 339 81 00 • Fax 34 93 330 75 02  
 URL: <http://www.premo.es>  
 e-mail: [sales@premo.es](mailto:sales@premo.es) e-mail: [tech@premo.es](mailto:tech@premo.es)

BAT012 (07/2000) Rev. A

DIMENSIONS XT5018

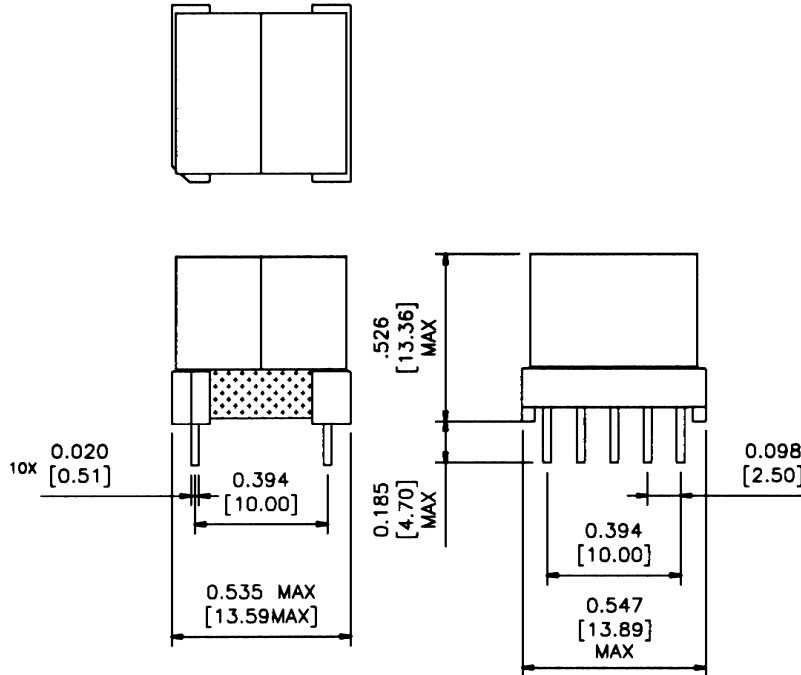

SCHEMATIC

