


ECM NEXUS Range

- VDE, and UL Approvals
- Transformers or High Current Chokes
- 100% Customised Design
- Low Load Losses and Mechanical Noise
- Up to 20kVA Rating
- Full Encapsulated or Taped Variations



‘Created to be superior’ with performance at the most extreme levels, where reliability is demanded without question. Produced in Europe using the latest technology combined with long established expertise, these components offer many mechanical as well as electrical advantages. Fully encapsulated versions are available for better insulation, heat dissipation, increased component life and ease of mounting. Other versions include varnish impregnated or melinex insulation, resin filled centre fixing, and fixed pin types or flying leads with various termination options.

TYPICAL COMPONENT OUTLINE

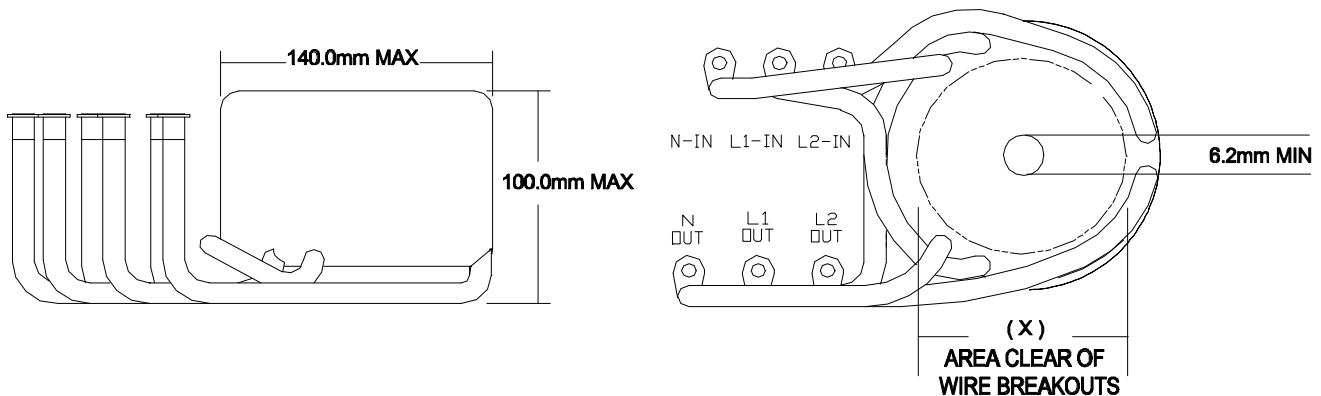

	TAPED CORE BODY TYPE	ENCAPSULATED TYPE
DIMENSION (X)	60.0mm MIN	20.0mm MIN

SUITABLE APPLICATIONS

UPS units for ISP applications, Internetworking equipment and Midrange Computers.

Transformerless Uninterruptible Supplies for Computer room applications, Telecommunications Generator site applications, Critical Servers, and ISP hub applications.