


ZTAC Series

- Surface Mount
- Fast Delivery
- Tape & Reel or Bulk Packaging
- Highly Competitive Prices for Volume Users



Series	Frequency Range	Frequency Tolerance	ESR	Temperature Tolerance	Aging
ZTAC-.-MG	2.00 – 2.99MHz	± 0.5%	100Ω	± 0.3%	± 0.3%
ZTAC-.-MG	3.00 – 3.49MHz	± 0.5%	50Ω	± 0.3%	± 0.3%
ZTAC-.-MG	3.50 – 8.00MHz	± 0.5%	30Ω	± 0.3%	± 0.3%
ZTAC-.—MG1	2.00 – 2.99MHz	± 0.3%	100Ω	± 0.3%	± 0.3%
ZTAC-.—MG1	3.00 – 3.49MHz	± 0.3%	50Ω	± 0.3%	± 0.3%
ZTAC-.—MG1	3.50 – 8.00MHz	± 0.3%	30Ω	± 0.3%	± 0.3%

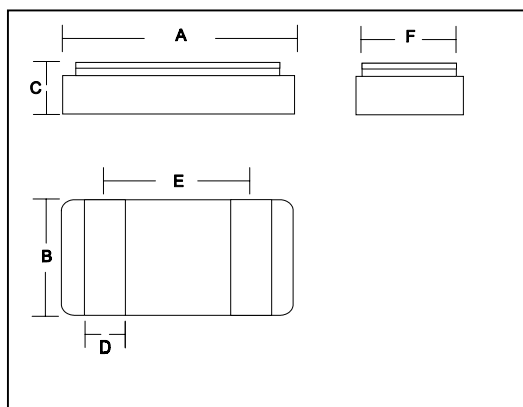

Series	A	B	C	D	E	F
MG/MG1	7.40	3.40	2.00	1.20	5.00	2.60

Dimensions in mm